




UNF BRAINGS SALES JAPAN CO.,LTD.

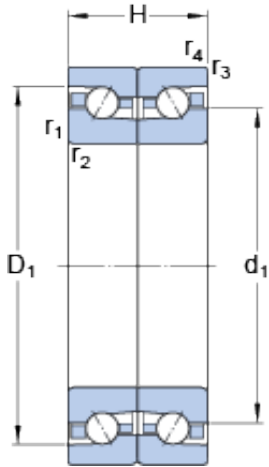

BTM 80 BTN9/HCP4CDB Bearing 2D drawings and 3D CAD models

SKF BTM 80 BTN9/HCP4CDB Light pressure contact seals Precision Bearings

Bearing No. BTM 80 BTN9/HCP4CDB

Size	80x125x40.5 mm
Bore Diameter	80 mm
Outer Diameter	125 mm
Width	40,5 mm
d	80 mm
D	125 mm
H	40.5 mm
d ₁	100.8 mm
D ₁	113.7 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
d _a - min.	86 mm
D _a - max.	121 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
d _n	97.9 mm
Basic dynamic load rating - C	39 kN
Basic static load rating - C ₀	85 kN
Fatigue load limit - P _u	3.6 kN
Limiting speed for grease lubrication	8400 r/min
Limiting speed for oil lubrication	10000 mm/min
Preload class A	400 N
Preload class B	1200 N



UNF BRAINGS SALES JAPAN CO.,LTD.

Static Axial rigidity, Preload class A	472 N/micron
Static Axial rigidity, Preload class B	705 N/micron
G_{ref}	16 cm
d_1	100.8 mm
D_1	113.7 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	86 mm
D_a max.	121 mm
r_a max.	1 mm
r_b max.	0.6 mm
d_n	97.9 mm
Basic dynamic load rating C	39 kN
Basic static load rating C_0	85 kN
Fatigue load limit P_u	3.55 kN
Attainable speed for grease lubrication	8400 r/min
Attainable speed for oil-air lubrication	10000 r/min
Static axial stiffnes for preload A	472 N/ μ m
Static axial stiffnes for preload B	705 N/ μ m
Reference grease quantity G_{ref}	16 cm ³
Mass bearing	1.65 kg